

The **ACCELERATOR**
 Rotating Tensioning Device

SA Series

Assembly instructions for SA Series Hardware

Assembly instructions for SA Series Turntables



Remove table base from package. Place on flat surface so the T-nuts and anti-slip pad are facing down.

Place the table top on the base. You should see the shur-loc sticker on the top of the table.

Insert the center knob into the hole in the center of the table. Tighten it a few turns to make sure it is attached.

Attach the corner knobs to each corner. Adjust the nut to make sure the corner bolt touches the surface below.

Your table is now completely set up for hardware mounting.

Assembly instructions for SA Series Base Plates



Attach your base plate to the table using your positioning knobs.


Mount all four bases using this method. Make sure the frame size is the same for all bases.

Place frame in the center of the frame pad supports and begin stretching.

If you are using a square bar frame, mount your square bar adapter or on the far side of the table.

Your square bar assembly should look like this. Be sure that your frame size is correct and stretch.

SA Series Hardware Adjustable Parts

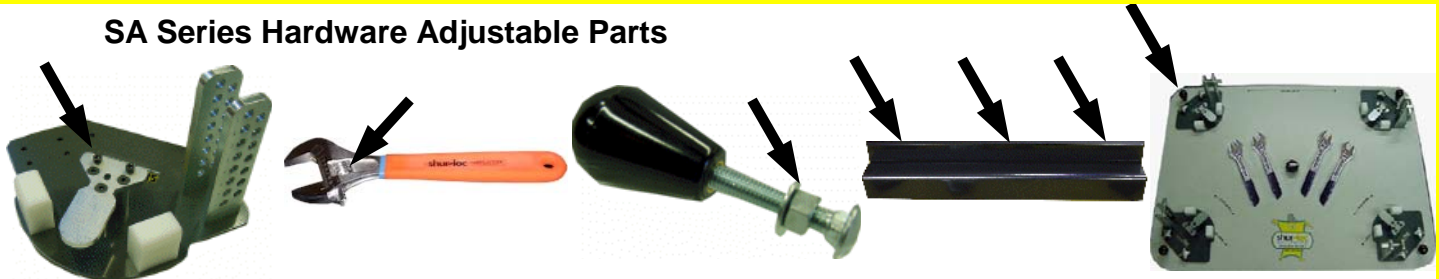

The screws on your frame pad support can be moved to support the corner of your frame to eliminate shifting.

Your Accelerator adjustable wrench can be sized to fit any size roller frame. Simply open or close the jaw.

Your corner support can be leveled to any work area surface by moving the nut on the bottom of the table.

The square bar adapter tightness can be adjusted by using the screws on the back side of the adapter.

Base plates can be moved to accommodate many frames. Make sure all bases are set to the same size.

For additional help with any shur-loc product, please visit www.shurloconline.com!

ALL shur-loc HARDWARE IS COVERED BY A LIFETIME WARRANTY*!

*Limited Lifetime Warranty – should any of these metal parts fail to perform satisfactory due to a defect or poor workmanship, return it to: JSMD Key Products LLC, 6323 83rd Ave S E, Snohomish, WA 98290, and it will be replaced free of charge. Incidental or consequential damages are excluded from this warranty.